


HCVB5 PN40+PN160 TWO-STAGE CONTROL VALVE TECHNICAL BRIEF

	Client:	Quotation No:	Valve desc:	KKS:	Valve specification:
--	---------	---------------	-------------	------	----------------------

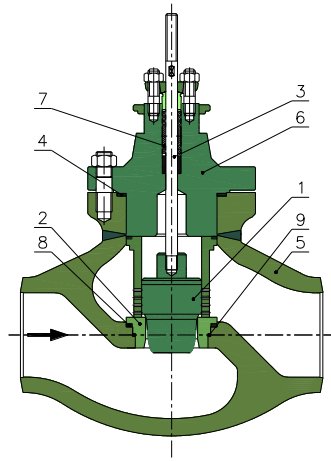

High Trim Control Valves **HCVB** are dedicated to operate under extremely tough conditions PN40+600, T(-50+600°C). The construction is based on cast body for PN40+160 and cored forged shape body for PN250+600, which is unique. The seat is put-in type, sealed with spiral gasket and additionally by metal C-ring. A wide variety of different trim designs makes the valves able to cope with heavy cavitation, flashing, choked flow and noise excessive conditions. This particular **HCVB5** type is applicable specially to control condensate flow. Medium pressure drop is divided into two with pressure recovery between stages. High Pressure Recovery Factor dedicates the valve to operate where high noise or cavitation reduction is demanded. Only FTO direction is feasible.

- Benefits:**
 Rangeability 1:100 available, high Pressure Recovery Factor
 High leakage class available (when unbalanced)
 Metal/metal planed bonnet with spiral gasket
 Any soft seals inside the body
 Easy maintenance – put-in seat.
 Butt weld ends / flange connection matching the pipe size
 All actuator systems are adaptable

Alternative solutions: Economic- MCV-P


Rangeability:	1:50 (Standard), 1:100 (Available)
100% open- main coefficients FTO	FL=0.98; XT=0.82; Fd=0.1; xFz=0.8

Kvs	Stroke	Seat diam.	DN min	DN max
0,1	20	-	15	50
0,16	20	-	15	50
0,25	20	-	15	50
0,4	20	-	15	50
0,63	20	-	15	50
1	20	9	15	50
1,6	20	14	15	50
2,5	20	14	15	50
4	20	19	15	50
6,3	20	19	20	50
10	20	25	25	50
16	20	34	32	65
25	20	44	40	80
40	20	50	50	100
63	40	70	65	150
94	40	90	80	200
125	40	100	100	250
160	40	110	125	250
250	50	125	150	250
320	50	160	150	250
500	63	194	200	300
630	63	194	200	300
800	100	240	250	300
1000	100	240	300	300
1300	100	270	300	300

Part No	Part Name	Specification position	Symbol	Material/performance	Part No	Part Name	Specification position	Symbol	Material/performance
1	Plug	X1 Performance	C	Profiled/Piston (HCVB)	5	Body	X8 Performance	1	DIN/PN Flanged
			P	Perforated				2	ANSI Flanged
		X2 Balancing	U	Unbalanced			3	BW Standard	
			B	Balanced			4	BW Specified	
		X3 Material	1	1.4571			1	1.0460, DN15-50	
			2	1.4571+stellite			2	1.0619	
			3	1.4571+nitrogen			3	1.5415, DN15-50	
			4	1.4057 hard. 35 HRC			4	1.7335, DN15-40	
			5	1.4125 hard. 55 HRC			5	1.5419	
			6	Other			6	1.7357	
		X4 Characteristic	L	Linear			7	1.4541, DN15-50	
			P	Equal-percentage			8	1.4404, DN15-50	
			M	Modified			9	1.4308	
			S	Other			10	1.4408	
15	1.7379								
2	Seat	X5 Material	1	1.4571	6	Bonnet	X10 Performance	1	Standard
			2	1.4541+Stellite				2	Spring strained
			3	1.4571+PTFE				3	TA-LUFT
			4	1.4571+NBR				4	Bellows
			5	Other				1	PTFE
-	-	X6 Leakage class EN-60534-4	1	IV Standard	7	Packing	X11 Material/Performance	2	PTFE V
			2	V Enhanced				3	PTFE Oxygen
			3	VI Special				4	Graphite Braided
-	-	X7 Flow Direction	FO	Flow to Open	5	Graphite Expanded			
3	Stem		1.4571, 1.4057 Hardened 35 HRC	8	Seat Gasket	1.4404+Graphite Spiral			
4	Body Gasket	1.4404+Graphite Spiral	9	C-ring	-				

VALVE SPECIFICATION


Full specification of the valve consists of:
HCVB5 – symbol
-X1-...-X11- symbols from the table on left
PN, DN, Kvs
Medium
Design medium parameters
Shut-off pressure
 Example:
HCVB5-C-U-2-P-2-2-FO-1-2-1-5, DN100, PN63, Kvs94.
Medium Water, Td=200°C, Pd=40bar
Shut-off pressure=20bar
 It is also recommended to specify working parameters as working pressure, temperature, pressure drop, flow and additional remarks if needed.
CAUTION:
 The client is not obligated to specify the valve when order. You can simply describe your expectations and INTEC sales person will specify adequate valve for you.

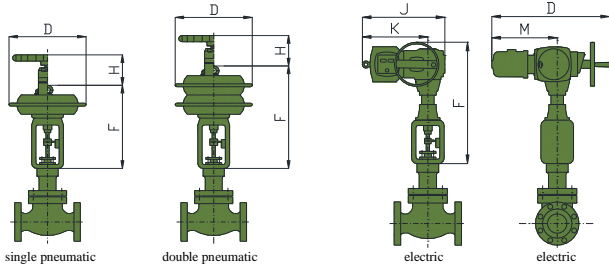

PNEUMATIC	Stroke	F	H	D	-	-	Mass
250	-	-	-	-	-	-	-
400	25	385	175	305	-	-	20
2x400	25	500	175	305	-	-	40
630	40	485	315	375	-	-	40
2x630	40	715	315	375	-	-	55
1000	60	650	300	480	-	-	70
2x1000	60	920	300	480	-	-	95
ELECTRIC	Stroke	F	M	D	J	K	Mass
XIRa, XIRSa	50	612	318	586	393	322	25
XIRb, XIRsb	50	651	335	602	422	335	34
XIRc, XIRSc	80	841	449	765	490	374	78
XIRa, XIRSa	100	732	318	586	393	322	25
XIRb, XIRsb	100	771	335	602	422	335	34
XIRc, XIRSc	160	991	449	765	490	374	85

Other actuators adaptable. For example AUMA actuators have closely similar dimensions and the same mechanical connections.

PN/DN	Dim.	15	20	25	32	40	50	65	80	100	125	150	200	250	300	
250	LF	230	260	260	300	300	350	400	450	520	600	700	800	900	1050	
	LBW	160	160	160	300	300	300	340	380	430	500	550	650	775	900	
	G	200	200	200	211	222	225	255	285	302	402	575	625	678	728	
	GM*	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-
	d1	M12x1,25				M16x1,5				M20x1,5				M24x1,5		
	d2	Ø57,15				Ø84,15				Ø95,25				Ø95,25		
	Mass	15	15	15	19	25	36	48	57	97	144	202	315	492	708	
320	LF	230	260	260	300	300	350	400	450	520	600	700	800	900	1050	
	LBW	160	160	160	300	300	300	340	380	430	500	550	650	775	900	
	G	200	200	200	211	222	225	255	285	302	402	575	625	678	728	
	GM*	-	-	-	-	-	-	-	-	-	-	-	-	-	-	
	d1	M12x1,25				M16x1,5				M20x1,5				M24x1,5		
	d2	Ø57,15				Ø84,15				Ø95,25				Ø95,25		
	Mass	15	15	15	19	25	36	48	57	97	144	202	315	492	708	
400	LF	264	273	308	349	384	451	508	578	673	794	914	1022	1270	1422	
	LBW	160	160	160	300	300	300	340	380	430	500	550	650	775	900	
	G	200	200	200	211	222	225	255	285	302	402	575	625	678	728	
	GM*	-	-	-	-	-	-	-	-	-	-	-	-	-	-	
	d1	M12x1,25				M16x1,5				M20x1,5				M24x1,5		
	d2	Ø57,15				Ø84,15				Ø95,25				Ø95,25		
	Mass	15	15	15	19	25	36	48	57	97	144	202	315	492	708	
600	LF	-	-	-	-	-	-	-	-	-	-	-	-	-	-	
	LBW	160	160	160	300	300	300	340	380	430	500	550	650	775	900	
	G	200	200	200	211	222	225	255	285	302	402	575	625	678	728	
	GM*	-	-	-	-	-	-	-	-	-	-	-	-	-	-	
	d1	M12x1,25				M16x1,5				M20x1,5				M24x1,5		
	d2	Ø57,15				Ø84,15				Ø95,25				Ø95,25		
	Mass	15	15	15	19	25	36	48	57	97	144	202	315	492	708	

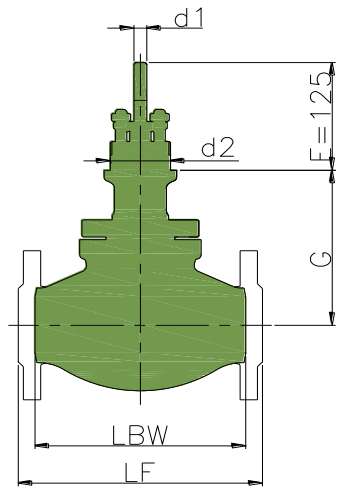

 Zakład Automatyki Przemysłowej INTEC Sp. z o.o. Bacciarellengo 54; 51-649 Wrocław tel./fax +48 71 3481818 e-mail: biuro@intec.com.pl http: www.intec.com.pl	 Fabryka Armatury Przemysłowej WAKMET sp. j. Bodzanów 75, 48-340 Głuchołazy 1 tel./fax +48 77 4394020 e-mail: wakmet@wakmet.com.pl http: www.wakmet.com.pl	
--	--	--